Open Pods



Open Pods

Design: Johan Kauppi

A muted pavilion, for meetings and work. The design has a clear horizontal expression, inspired by the landscape of Swedish Lapland. The system is based on identical acoustic baffles of fabric, mounted at consistent distances, giving the furniture a balanced combination of sound absorption and transparency, for large-scale repetition in public interiors.

DIMENSIONS



Width: 2366 mm Depth 2300 mm Height: 2945 mm Weight: 400 kg

DESCRIPTION

Barn 300 has a white metal frame in 40 mm square tubes. The parts are coupled with hidden connection angles. 32 panels that form walls and roof are hooked onto the frame. The floor is a 15 mm single-piece parquet floor in white-painted ash wood. It is placed on the 40 mm frame and cellular plactic. Lamp hooks, cable ducts and a double power outlet are standard. The housing has a polyester felt to protect against the floor.

Panels: 19 mm Lightweight MDF with 6 mm polyether and

fabric. Matching colours in fabric piping.

Metal frame: Powder coated NCS S 0500-N White

100% recyclable material.

Ask Air is a 1-pole floor with a refined expression in a clean, exclusive sorting and a light white shade. The four-sided microfase around each board highlights the classic shelf format. The ultra-matte surface minimizes the reflections of the light and allows the colour and feel of the floor to come to its fullness while protecting the wood from daily wear. Detailed Description - Naturally occurring variations in the wood colour are allowed. The product has medium, black twigs. The quays can vary in size and number.

Colour change - Coloured product, visible change over time. Ultra-finished lacquer. Hardness (Brinell Value) 4.0

White grounded double outlet located at the center post on one side. Electrical connection must be done by a qualified electrician.


FABRIC AND PIPING


Look in Product sheet Fabric and piping.pdf for our standard fabrics

MOUNTING

The frame is screwed together with hidden connecting angles. The panels are hooked with neck braces on the outside of the body. The floor is dimensionally sized and clipped on top of cellular plastic and square tubes. An aluminum threshold frame is screwed along both edges.

Open Pods

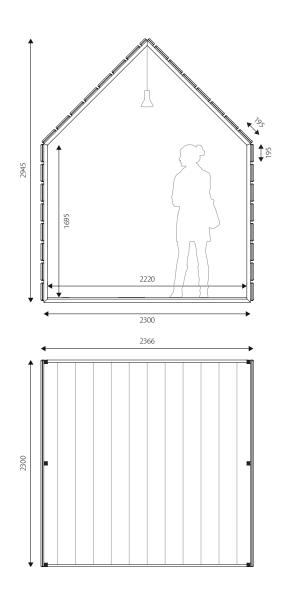

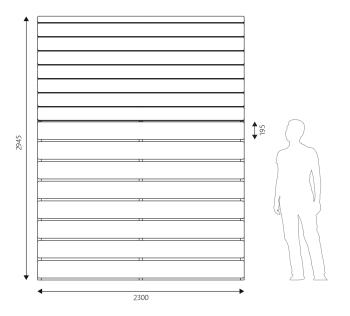

Open Pods

Design: Johan Kauppi

CERTIFICATES

Möbelfakta: The product meets the requirements for environment and social responsibility defined by Möbelfakta

certified according to

ISO 9001:2015 and ISO 14001:2015.

SPECIFICATION TEXT

E.g: Barn 300, 2366x2300x2945 mm. Fabric: Blazer CUZ28, piping 18.









Open Pods



Open Pods

Design: Johan Kauppi

A stripped, slightly smaller / lower variant of Barn 300. The design has a clear horizontal expression, inspired by the landscape of Swedish Lapland. The system is based on identical acoustic panels of fabric, mounted at consistent distances, giving the furniture a balanced combination of sound absorption and transparency, for large-scale repetition in public interiors.

DIMENSIONS

Barn 270



Width: 2209 mm Depth: 2300 mm Height: 2640 mm Weight: 250 kg

OPTIONS

Barn 270 is also available with solid panels s.c.
Barn 270 Solid.

DESCRIPTION

Barn 270 has a white metal frame in 40 mm square tubes which stands on a frame in flat iron. The parts are coupled with hidden connection angles. 28 panels that form walls and roof are hooked onto the frame. Lamp hook is standard.

 ${\bf Panels:}~19~{\rm mm~lightweight~MDF~with~6~mm~polyether~and}$

fabric. Matching colours in fabric piping.

Metal frame: Powder coated NCS S 0500-N White


100% recyclable material.

FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics

MOUNTING (2 PEOPLE) MINIMUM HEADROOM: 2,7 METERS

Barn: The frame is screwed together with hidden connecting angles. The panels are hooked with neck braces on the outside of the body. Full stability is achieved when all panels are mounted.

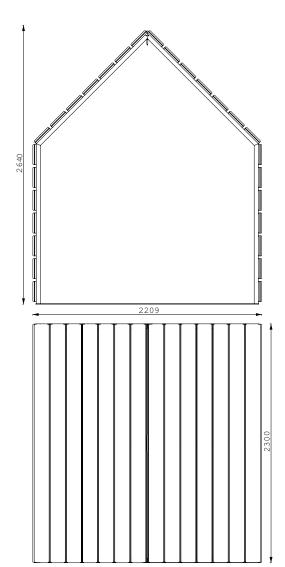

Open Pods

Design: Johan Kauppi

CERTIFICATES

Möbelfakta: The product meets the requirements for environment and social responsibility defined by Möbelfakta


certified according to

ISO 9001:2015 and ISO 14001:2015.

SPECIFICATION TEXT

E.g: Barn 270, 2209 x 2300 x 2640 mm.

Fabric: Blazer CUZ28, piping 18.

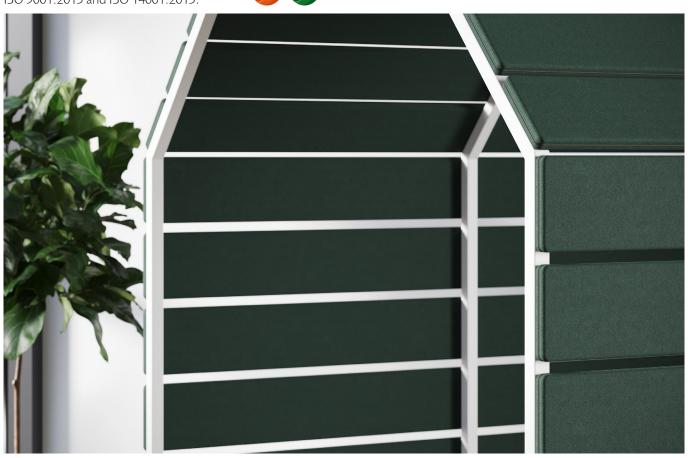



Open Pods

Design: Kauppi & Kauppi



Open Pods

Design: Kauppi & Kauppi

A stripped, slightly smaller / lower variant of Barn 270 which is developed for projects where the ceiling height is about 2.40 m. The design has a clear horizontal expression, inspired by the landscape of Swedish Lapland. The system is based on acoustic panels of fabric, mounted at consistent distances, giving the furniture a balanced combination of sound absorption and transparency, for large-scale repetition in public interiors. For Barn 235, there are fixed benches and desks that can also be supplemented afterwards.

DIMENSIONS Barn 235




Width: 1896 mm

Depth: 1863 mm (incl gable)

1830 mm (excl gable)

Height: 2350 mm

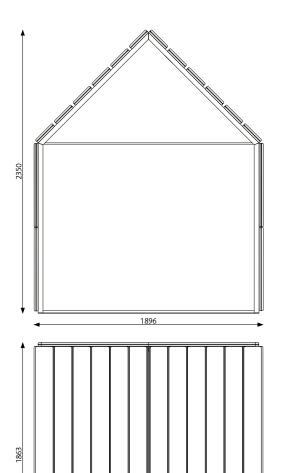

DESCRIPTION

Barn 235 has a white metal frame in 40 mm square tubes which stands on a frame in flat iron. The parts are coupled with hidden connection angles. Panels that form walls and roof are hooked onto the frame.

Panels: 19 mm lightweight MDF with 6 mm polyether and fabric. The nails are covered with a decorative piping cord.

Metal frame: Powder coated NCS S 0500-N White

100% recyclable material.

Mounting: (2 persons) ceiling height at least 240 cm The frame is screwed together with hidden connecting angles.

The panels are hooked with neck braces on the outside of the body. Full stability is achieved when all panels are mounted.

DESIGNS



Gable open, roof solid



Gable open, roof panels



Gable semi open, roof solid



Gable semi open, roof panels



Gable solid, roof solid



Gable solid, roof panels

Open Pods


Design: Kauppi & Kauppi

FABRIC AND PIPING

The bench is only upholstered in furniture fabrics that meet Möbelfakta's requirements.

See Product sheet Fabric and Piping.pdf for our standard fabrics

OPTIONS



Bench with back rest

Fabric-covered bench 1820 x 450 mm. Height 450 mm. Fixed mounted.

Powerdot Bracket, 1 Power 2 USB/A 1 Charger, white.

CERTIFICATES

Möbelfakta: The product meets the requirements for environment and responsible supply chains defined by Möbelfakta certified according to ISO 9001:2015 and ISO 14001:2015.





SPECIFICATION TEXT


E.g: Barn 235, 1896 x 1863 x 2350 mm White.

Fabric: Blazer Lite LTH61, piping 474.

Two fabric-covered benches with back rest. 1820 x 450 mm. Blazer CUZ28. Height 450 mm.

Fixed mounted.

Powerdot Bracket, 1 Power 2 USB/A 1 Charger, white.



Coupé table

550 x 550 mm or 550 x 1000 mm.

Ash with rounded edge in plywood, column stand white. Height 740 mm.



Work

Worktop $1800 \times 700 \times 25$ mm. Ash with edge band. Height 740 mm. Fixed mounted.

Other options

Carpet: Ogeborg Foris / Essential 1031 (5.8 mm) molded 1750x1750mm. Electrical outlet in frame.

Open Pods

Design: Kauppi & Kauppi






PRODUCT SHEET / 2023 01 02

Fences

Acoustic floor screens

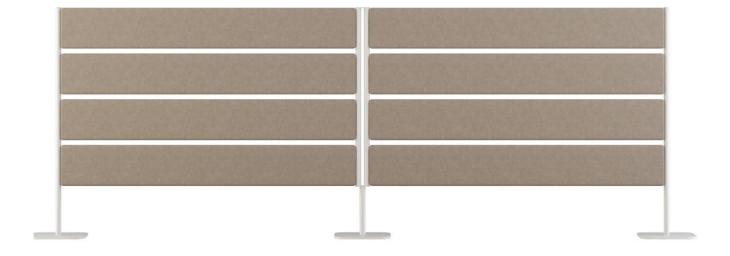

Fences


Acoustic floor screens

Design: Johan Kauppi

A family of repeatable room dividers, for meetings and work. The design has a clear horizontal expression, inspired by the landscape of Swedish Lapland. The system is based on identical acoustic baffles of fabric, mounted at consistent distances, giving the furniture a balanced combination of sound absorption and transparency, for large-scale repetition in public interiors.


DIMENSIONS

Fences 4



Width: 1200, 1600 mm Height: 1103 mm Weight: 38 kg, 42 kg Thickness: 33 mm (panels), 30 mm (pipes)

Fences 6



Width: 1200, 1600 mm Height: 1550 mm Weight: 46 kg, 54 kg Thickness: 33 mm (panels), 30 mm (pipes)

DESCRIPTION

Fences has 4 or 6 sound absorbing panels that hooks up with air gap between 30 mm white powder coated pipes. Between the screens, there are connecting pipes and the outer edges have endpipes. Each pipe is mounted on a 300 mm rectangular metal plate.

Panels: 19 mm lightweight MDF coated with 6 mm polyether and fabric. Piping in matching color.

Metal frame: Powder-coated NCS S 0500-N White 100% recyclable materials.

FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics

MOUNTING

Fences: The panels with integrated brackets hatch quickly in the endpipe and coupling pipes with integrated coupling brackets. Then the feet are mounted and the screens can be raised to complete the assembly with the top and bottom coupling tabs.


OPTIONS

All Fence modules are also available with one solid baffle s.c. Fences Solid.



Fences

Acoustic floor screens

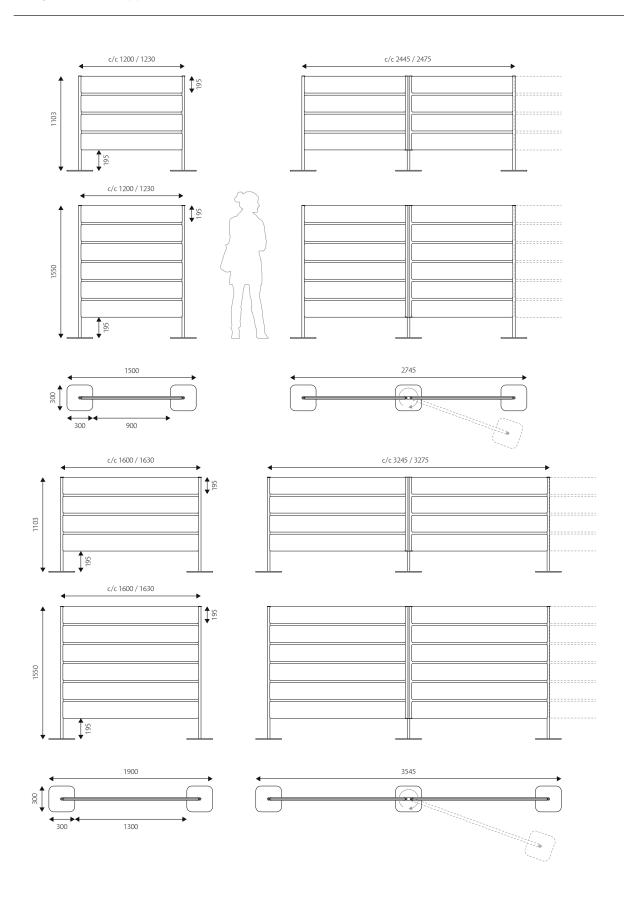

Fences

Acoustic floor screens

Design: Johan Kauppi

CERTIFICATES


Acoustics: Measurements made in accordance with ISO 354. Evaluation made according to standards for individual objects SS 25269 (Report 19-709-R1, Date 2019-04-08, Akustikverkstan, laboratory accredited by Swedac) certified according to ISO 9001:2015 and ISO 14001:2015.

SPECIFICATION TEXT

E.g: Fences 4, 1200x1103 mm, powder coated white. Fabric: Blazer CUZ28, piping18.



Sound absorption area according to ISO 354 and SS 25269



Sound absorption area according to ISO 354 and SS 25269

